

Thermal Type Multi-Line ECR

ER-380M

Fiscal Version Available



**Quick, Quiet, &
Economical Thermal
Electronic Cash Register**

Best Features

Mix & Match

- This function uses an automatic discount table for easy facilitation of special promotions.

Barcode Scanning

20 Groups And 3000 E/J (Default)

PC Communication With RS-232C

Balance Tracking With Billing

Interrupt Cashier Layaway

Management Reports

Easy Paper Loading

- You can meet drop in type printer

All the features you need

DEPARTMENT(NLU)	12
PLU	300(Max. 5000)
GROUP	20(Max. 99)
ELECTRONIC JOURNAL	3000 Lines(Default)
DESCRIPTION	18 Char.
CLERK	15(Max.99)
BUFFER RECEIPT	Yes
TRAINING MODE	Yes
RECEIPT PREAMBLE/POSTAMBLE	6 lines / 6lines
KP OPERATION	Yes
TENDERING	Cash, Check, Charge 8
CURRENCY CONVERSION	4
CONVERSION RATE	7 Digits
DECIMAL POINT	0-3 Selectable
GRAGHIC LOGO PRINT	Yes (8 Lines)

ER-380M

ER-380M is an excellent low cost solution for a wide range of retail environments.

ER-380M, with its superb thermal printing system, always provides the fastest in transaction speeds.

And ER-380M provides 2 lines and 16 char. LCD for operator's convenience.

A standard capacity of 300 PLUs and 20 Groups allows for easy item management.

ER-380M is an economically powerful way to fulfill all retail business requirements.

SAM4S
www.sam4s.com

Receipt Sample




Basic Specifications

MODEL NAME		ER-380M
PRINTER	TYPE	1-Station Direct Thermal Type
	SPEED	13.3 Line Per Sec
	PAPER WIDTH	57.5mm
KEYBOARD		44 Raised
DISPLAY	OPERATOR	16char. x 2 Lines LCD
	CUSTOMER	10-Digit VFD
MEMORY	ROM	4Mbit
	RAM	2Mbit(Default), 4Mbit (Option)
MEMORY PROTECTION BATTERY		60 Days
INTERFACE	RS-232C	2 Ports
POWER REQUIREMENT		120V/60HZ, 230V/50HZ
POWER CONSUMPTION		Reg(25W)
DRAWER	TYPE	5B/5C, 4B/8C, 7B/8C
	PORT	1 Port
ENVIRONMENT	TEMPERATURE	32°F~104°F(0°C~40°C)
CONDITION	HUMIDITY	30%~80% RH
DIMENSION (W x D x H, mm)	SET	400 x 450 x 266 With Drawer
	DRAWER	400 x 450 x 112
WEIGHT		13.0 Kg
FACTORY OPTION		Memory (4Mbit x 1)
		Water Proof
		Dust Cover

Multi line LCD



Keyboard

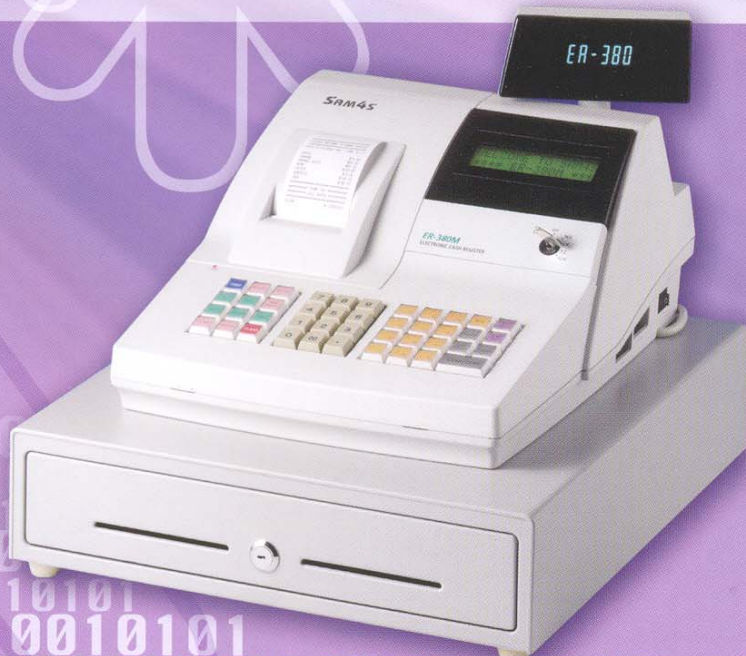

01010100110100100110010101
 010100110100100110010101
 00110100100110010101010011010010011001010